


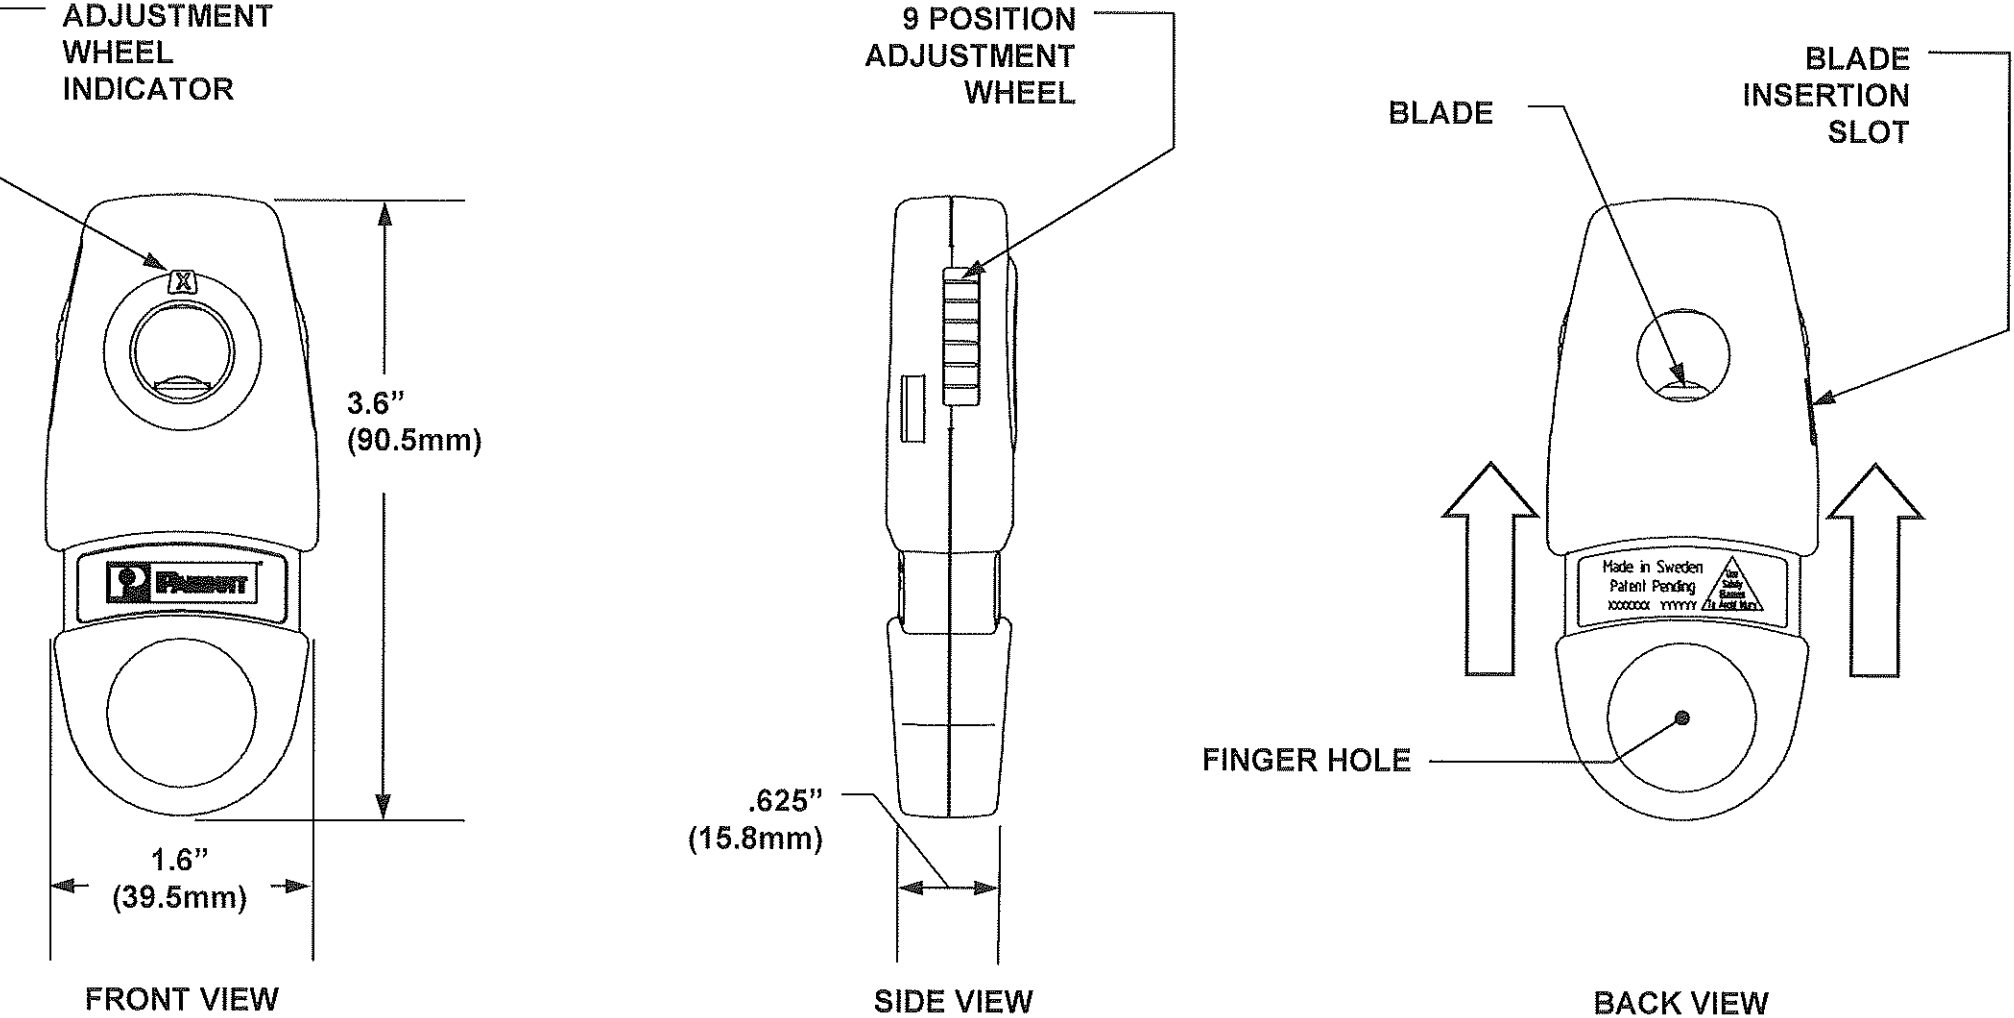


PANDUIT PART NO. CFAST Tool
Weight: 0.9 oz. / ea. (28 g.) / ea.

- NOTES:
- STRIPS INSULATION UP TO 0.040" (1.0mm) of MULTICORE CABLE, UTP/STP CABLE, FIBER OPTIC CABLE, ETC.
 - STRIP RANGE: 0.1" – 0.43" (2.5 – 11mm)

REPLACEMENT BLADE KIT: CFASTB
(see drawing below)

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

[A]

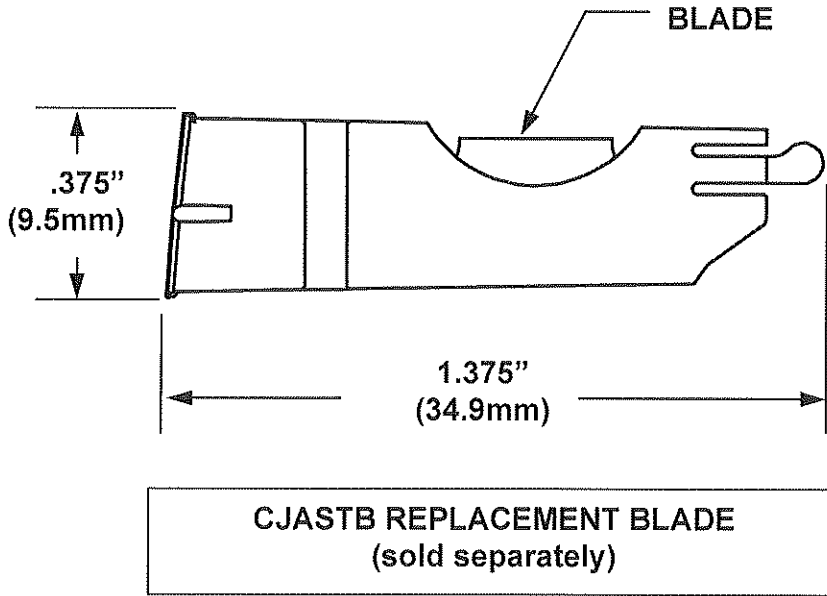

F:\wrkgrp\rvusers\ENGRDOCS\CUST
DWG\CG24591B01_02 CFAST CD.doc

										PANDUIT CORP. TINLEY PARK, ILLINOIS		
										CFAST		
										CUSTOMER DRAWING		
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
02	8-18-11	BLR	REL	ADD CFASTB BLADE KIT	4415	---	LAH			DRAWN BY: BLR		
01	6-19-02	BLR	APB	REMOVE NOTE [A] AND PICTORAL	4030	---	LAH			DATE: 5-16-02		
00	5-16-02	BLR	APB	RELEASED	4030	---	LAH			CHK'D: APB		
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP		SCALE: NONE		
										DRAWING NO. CG24591B01		
										DWG SIZE: B		