NetManager[™] High Capacity Horizontal Cable Managers



specifications

The high capacity horizontal cable managers shall be capable of managing high performance cable on the front and rear of any 19" EIA rack. The high capacity horizontal cable managers shall be molded plastic with bend radius fingers that protect the cable. The fingers shall be inset towards the rack to allow easy access to patch cords and terminations. Standard pass through holes shall incorporate bend radius control. Dual hinged covers shall allow access to the cable pathway.



technical information

Part Number	RU	Height in. (mm)	Width in. (mm)	Depth in. (mm)
NM1	1	1.7 (44)	19 (482)	13.1 (332)
NM2	2	3.5 (88)	19 (482)	13.1 (332)
NM3	3	5.2 (133)	19 (482)	13.1 (332)
NM4	4	7.0 (177)	19 (482)	13.1 (332)
NMF1	1	1.7 (44)	19 (482)	6.2 (157)
NMF2	2	3.5 (88)	19 (482)	6.2 (157)
NMF3	3	5.2 (133)	19 (482)	6.2 (157)
NMF4	4	7.0 (177)	19 (482)	6.2 (157)

Temperature ratings:

Max storage temperature 65°C (149°F); max operating temperature 60°C (140°F)

key features and benefits

Inset fingers	Fingers slope inward offering greater access to network cabling for easier moves, adds, and changes
Deep channel opening	Provides increased cable capacity in less rack space
Front finger spacing	Wide front finger openings easily accommodate Category 6A and Category 6 copper cables speeding installation and reducing maintenance costs
Rear finger spacing	Rear cable management finger spacing utilizes open D-rings for greater accessibility
Dual hinged cover	Opens 110 degrees to the top or bottom to provide complete access to the horizontal pathway without having to remove the cover
Flush appearance with NetRunner [™] High Capacity Vertical Cable Manager	Used together to improve data center and telecommunication room aesthetics

applications

Panduit[®] NetManager[™] High Capacity Horizontal Cable Managers provide an efficient way to manage high performance copper, fiber optic, or coaxial cables on any 19" rack. Fixed inset fingers on the front and back allow easier access to the ports for moves, adds, and changes. Fixed bend radius fingers organize and protect patch cords as they exit patch panels and as they transition into the vertical pathway. All of these features combine to

provide the user with a horizontal cable management solution that simplifies cable routing in a finished professional appearance. When used with Panduit[®] Mini-Com[®] Patch Panels, patch cords, vertical cable managers, and racks, the user receives a total system that satisfies functional and aesthetic requirements for data centers and telecommunications rooms.

NetManager[™] High Capacity Horizontal Cable Managers

Front and Rear	
1 RU manager,	
front and rear:	NM1*
2 RU manager,	
front and rear:	NM2*
3 RU manager,	
front and rear:	NM3*
4 RU manager, front and rear:	NM4*
	INIVI4
Front Only	
1 RU manager	
front only:	NMF1*
2 RU manager	
front only:	NMF2*
3 RU manager	
front only:	NMF3*
4 RU manager front only:	NMF4*
Front to Rear Pass Through Blanking	Panole
1 RU:	NM1B
2 RU:	NM2B
3 RU: 4 RU:	NM3B NM4B
NetRunner [™] Vertica	al Managers
Front and rear	
vertical manager:	WMPVHC45E
Front only	
vertical manager:	WMPVHCF45E
Panduit Racks	
2 Post EIA Standar	d
Rack 7' 19" Width	
with #12-24	
threaded rails:	R2P*
threaded rails: 4 post rack 7' 30"	R2P*
threaded rails: 4 post rack 7' 30" depth with #12-24	
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails:	R2P*
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23"	
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24	R4P^*
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23"	
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24	R4P^* R4P23^
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails:	R4P^*
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails: 4 post rack 7' 42"	R4P^* R4P23^
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails: 4 post rack 7' 42" depth with #12-24	R4P^* R4P23^ R4P36^*
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails: 4 post rack 7' 42" depth with #12-24 threaded rails:	R4P^* R4P23^ R4P36^* R4P42^
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails: 4 post rack 7' 42" depth with #12-24 threaded rails: Panel Extender Bra	R4P^* R4P23^ R4P36^* R4P42^ nckets
threaded rails: 4 post rack 7' 30" depth with #12-24 threaded rails: 4 post rack 7' 23" depth with #12-24 threaded rails: 4 post rack 7' 36" depth with #12-24 threaded rails: 4 post rack 7' 42" depth with #12-24 threaded rails:	R4P^* R4P23^ R4P36^* R4P42^


*Part number shown as Black. Add Suffix WH for White.

2 RU:

^ For racks with cage nut rails, add "CN" to end of part number.

PEB2

NetManager[™] High Capacity Horizontal Cable Managers

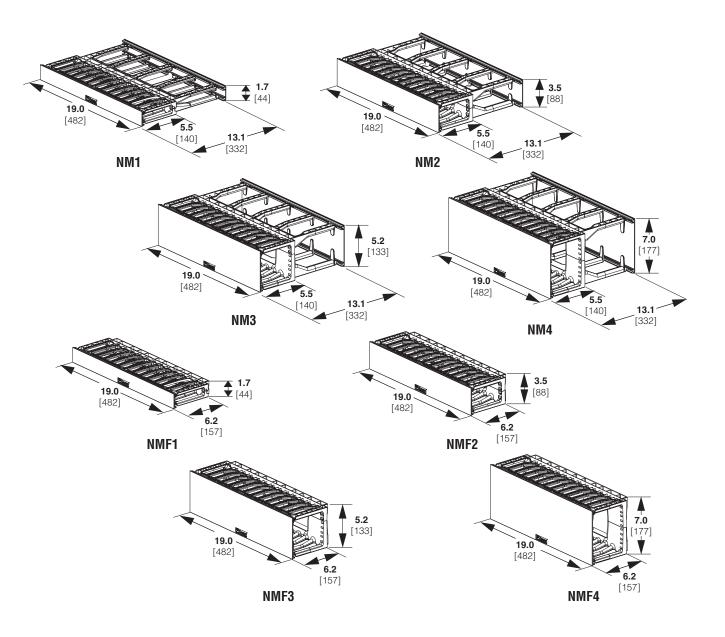

Dimensions are in inches. (Dimensions in parenthesis are metric).

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information Visit us at www.panduit.com Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 © 2020 Panduit Corp. ALL RIGHTS RESERVED. RKSP149--WW-ENG Replaces WW-RKSP23 8/2020