


Cat.7 23/1awg S/FTP  
Horizontal Cable FR-LSZH SHF1

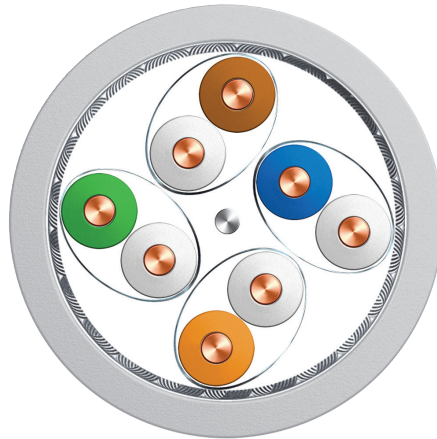

## Application

DNV Approved Cat.7 100Ω Class F for Offshore installations, Maritime Environment, High data rates, Indoor use, fixed installations, Ships, High speed & Light craft.

## Cable Design

Conductor	Solid Annealed Bare Copper wire 23/1 AWG
Insulation	Skin-foam-skin polyethylene
Formation	2 cores twisted to a pair, 4 pairs total
Pair Identification	Per TIA/EIA 568-B
Pair Shield	Aluminium/polyester foil, 100% coverage
Braid Shield	Annealed Tinned Copper Wire Braid
Outer Jacket	FR-LSZH SHF1, Light Grey
Overall Diameter	8,20 ± 0,5 mm

Cat.7 23/1awg S/FTP  
Horizontal Cable FR-LSZH SHF1

## Standards

Applicable Standards	DNV certified, IEC 60092-360, IEC 61156-5, IEEE 802.3at (PoE+), ISO/IEC 11801, RoHS-2 2011/65/EU
Flammability Rating	IEC 60332-1, IEC 60332-3-22, IEC 60754-1/2, IEC 61034-1/2, UL 1581

## Performance

DC Resistance	$\leq 9.5 \Omega/100m$
DC Resistance Unbalance	$\leq 2.00\%$
Capacitance Unbalance (Pair to Ground)	$\leq 1600 \text{ pF/km (800~1000Hz)}$
Insulation Resistance	$\geq 5000 \text{ M}\Omega\cdot\text{m}$
Dielectric Strength	2.5 / 2 DC kV/sec
Return Loss dB/100m	$\geq 20 + 5 * \log(\text{freq})$ , $4 \leq f < 10\text{MHz}$
	$\geq 25$ , $10 \leq f < 20\text{MHz}$
	$\geq 25 - 7 * \log(\text{freq}/20)$ , $20 \leq f \leq 600\text{MHz}$ (min. 17.3dB)
Attenuation (Insertion Loss) dB/100m	$\leq 1.8 * \sqrt{(\text{freq})} + 0.01 * (\text{freq}) + 0.2/\sqrt{(\text{freq})}$ , 4 ~ 600 MHz
NEXT Loss dB/100m	$\geq 102.4 - 15 * \log(\text{freq})$ , 4~600MHz (max. 78dB)
Power sum NEXT Loss dB/100m	$\geq 99.4 - 15 * \log(\text{freq})$ , 4~600MHz (max. 75dB)
ACRF Loss dB/100m	$\geq 94.0 - 20 * \log(\text{freq})$ , 4~600MHz (max. 78dB)
Power sum ACRF Loss dB/100m	$\geq 91.0 - 20 * \log(\text{freq})$ , 4~600MHz (max. 75dB)
Propagation Delay ns/100m	$\leq 534 + 36 / \sqrt{(\text{Freq})}$ , 4~600MHz
Propagation Delay Skew ns/100m	$\leq 25$ , 4~600MHz

Cat.7 23/1awg S/FTP  
Horizontal Cable FR-LSZH SHF1

## Electrical Properties Cat. 6A Screened-pair Horizontal Cables \*

Freq. (MHz)	Attenuation (dB/100m) Max.	NEXT (dB/100m) Min.	PS NEXT (dB/100m) Min.	ACRF (dB/100m) Min.	PS ACRF (dB/100m) Min.	RL (dB/100m) Min.	P.Delay (ns/100m) Max.
4	3.7	78.0*	75.0*	78.0*	75.0*	23.0	552
8	5.2	78.0*	75.0*	75.9	72.9	24.5	547
10	5.9	78.0*	75.0*	74.0	71.0	25.0	545
16	7.4	78.0*	75.0*	69.9	66.9	25.0	543
20	8.3	78.0*	75.0*	68.0	65.0	25.0	542
25	9.3	78.0*	75.0*	66.0	63.0	24.3	541
31,25	10.4	78.0*	75.0*	64.1	61.1	23.6	540
62,5	14.9	75.5	72.5	58.1	55.1	21.5	539
100	19.0	72.4	69.4	54.0	51.0	20.1	538
200	27.5	67.9	64.9	48.0	45.0	18.0	537
400	40.0	63.4	60.4	42.0	39.0	17.3	536
600	50.1	60.7	57.7	38.4	35.4	17.3	535

*The cable performance between 1 MHz and 4MHz is achieved by design only and it is therefore not necessary to test for this performance below 4MHz. (According to the IEC 61156-5 standard)*

## Specification

Part Number	Type
AML7-SF23-ZF1	Armada® Cat.7 4x2x23/1 AWG S/FTP Horizontal Cable FR-LSZH SHF1 <DNV Approved>