

## Features

- ▶ HDMI version 2.1 - 48Gbps for resolutions up to 8K UltraHD-2 60Hz
- ▶ Gold plated precision contacts with PureLink SLS™ (Secure-Lock-System™)
- ▶ HDMI-A male to HDMI-A male, full-metal housing
- ▶ Hybrid cable - Fiber for AV; copper for power and data, Ø 4.5mm
- ▶ AOC technology without external power supply, EMI resistance, low attenuation

### Connections

Connector Material	Aluminium / Plastic
Contact Material	Gold-plated
Connector 1	HDMI-A Male with SLS™
Dimensions Connector 1	50 x 20 x 10.8 / 13.38 mm
Connector 2	HDMI-A Male with SLS™
Dimensions Connector 2	50 x 20 x 13.38 mm

### Cable



Type	AOC Fiber / Copper Hybrid Cable
Construction	4x OM3 Fibers, 7x Copper Conductors
Optical Converter	4ch 850nm VCSEL + 4 CH GaAs PD Array
Jacket Outer Material	Halogen-free, CPR Compliant
Cable Outer Diameter	4.5mm
Minimum Bend Radius	45mm Static, 90mm Dynamic
Tensile Strength	Up to 238N

### Signal Transmission

Transmission Modes	AV via Fiber, Power and Data via Copper
Standard	Ultra High Speed HDMI, HDMI v2.1 Compatible
Bandwidth	48 Gbps für 8K / UltraHD-2 @60Hz 4:4:4 10bit
eARC Compatibility	Up to 20m
Output Power	5V HDMI

### General

Transmission Distance	Up to 100m, up to 20m ATC Certified
Operation / Storage Temperature	-20~70°C / -25~80°C
Relative Humidity	10~80%
Power Supply	No external Power Supply required (draws power from source device)
Packaging	Paper Brownbox with Sticker, PAP 20
Certification	CE, FCC, ROHS, REACH, CPR

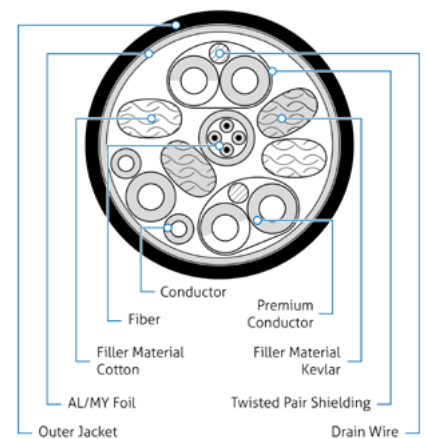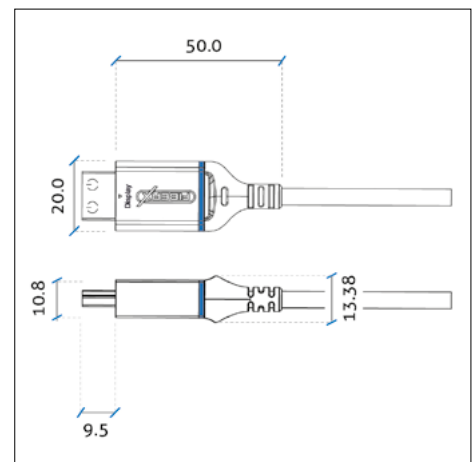

## FX-I380 Overview

Parent	Art.-No.	Length	Colour	EAN
FX-I380	FX-I380-005	5.00m	black	4251364731550
	FX-I380-007	7.50m	black	4251364731567
	FX-I380-010	10.00m	black	4251364731574
	FX-I380-012	12.50m	black	TBA
	FX-I380-015	15.00m	black	4251364731581
	FX-I380-020	20.00m	black	4251364731598
	FX-I380-025	25.00m	black	TBA
	FX-I380-030	30.00m	black	TBA
	FX-I380-040	40.00m	black	TBA
	FX-I380-050	50.00m	black	TBA
	FX-I380-060	60.00m	black	TBA
	FX-I380-070	70.00m	black	TBA
	FX-I380-100	100.00m	black	TBA